



## User Manual

HDMI Splitter 1x4 4K (60Hz 4:4:4) HDR with Downscaling

Model PT-SP-HD14D

Designed in Germany

## Preface

Read this user manual carefully before using this product. Pictures shown in this manual are for reference only. Different model layouts and specifications are subject to the physical product.

This manual is for operation instructions only, not for any maintenance usage.

In the constant effort to improve our product, we reserve the right to make changes in functions or parameters without prior notice or obligation.

## Trademarks

Product model and logo are trademarks. Any other trademarks mentioned in this manual are acknowledged as the properties of the trademark owner. No part of this publication may be copied or reproduced without the prior written consent.

## FCC Statement

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. It has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a commercial installation.

Operation of this equipment in a residential area is likely to cause interference, in which case the user at their own expense will be required to take whatever measures may be necessary to correct the interference.

Any changes or modifications not expressly approved by the manufacture would void the user's authority to operate the equipment.



**REACH | 1907/2006/EU**

**ROHS | 2011/65/EU**

PureLink hereby declares that this product **PureTools PT-SP-HD14D** complies with Directives 1907/2006/EU und 2011/65/EU.

**EMC / LVD (Electro Magnetic Compatibility / Low Voltage Directive)**

PureLink GmbH hereby declares that this product **PureTools PT-SP-HD14D** complies with Directives 2014/30/EU and 2014/35/EU. The full text of the EU Declaration of Conformity is available at the following Internet address:

[http://www.purelink.de/ce/4251364718261\\_CE.pdf](http://www.purelink.de/ce/4251364718261_CE.pdf)



## SAFETY PRECAUTIONS

To ensure the best from the product, please read all instructions carefully before using the device. Save this manual for further reference.

- Unpack the equipment carefully and save the original box and packing material for possible future shipment
  - Follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
  - Do not dismantle the housing or modify the module. It may result in electrical shock or burn.
  - Using supplies or parts not meeting the products' specifications may cause damage, deterioration or malfunction.
  - Refer all servicing to qualified service personnel.
  - To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
  - Do not put any heavy items on the extension cable in case of extrusion.
  - Do not remove the housing of the device as opening or removing housing may expose you to dangerous voltage or other hazards.
  - Install the device in a place with fine ventilation to avoid damage caused by overheat.
  - Keep the module away from liquids.
  - Spillage into the housing may result in fire, electrical shock, or equipment damage. If an object or liquid falls or spills on to the housing, unplug the module immediately.
  - Do not twist or pull by force ends of the optical cable. It can cause malfunction.
  - Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.
  - Unplug the power cord when left unused for a long period of time.
  - Information on disposal for scrapped devices: do not burn or mix with general household waste, please treat them as normal electrical wastes.
-

## Product Introduction

Thanks for choosing the HDMI 2.0 1x4 Splitter, which can distribute one HDMI input to four outputs. The splitter supports HDMI video resolution up to 4K@60Hz 4:4:4, 1080P 3D, and multichannel audio formats. Besides passing EDID information from the display, there are multiple built-in EDID settings can be selected by the 4-pin DIP switch on the front panel. Moreover, the splitter supports convenient firmware upgrade through Micro-USB port.

## Features

- Supports HDMI 2.0 and the video resolution up to 4K@60Hz 4:4:4.
- HDMI input supports HDCP 2.2 and the outputs support HDCP Active or HDCP Passive mode.
- Supports video resolution down-scaling, the 4K input can be automatically degraded to 1080P output for compatibility with 1080P display.
- 18Gbps high bandwidth.
- Advanced EDID management: multiple built-in EDID settings can be selected.
- Built-in equalizer for signal enhancement to avoid signal attenuation in transmission.
- Supports CEC pass-through.
- Provides LEDs to indicate the current operating status.
- Firmware upgrade by Micro-USB port.

## Packing List

- 1x HDMI 2.0 1x4 Splitter
- 4x Plastic Cushions
- 1x Power Adapter (5V DC 1A)
- 1x User Manual

**Note:** Please contact your distributor immediately if any damage or defect in the components is found.


## Panel Description

### Front Panel



- ① **POWER LED:** The LED illuminates red when power is applied.
- ② **INPUT LED:** The LED illuminates blue when there is HDMI input.
- ③ **OUTPUT LEDs:** The LED illuminates blue when there is HDMI output on the corresponding channel.
- ④ **EDID:** 4-pin DIP switch for EDID setting and HDCP mode selection. Please refer to the [\*\*\*EDID Management\*\*\*](#) for more details.
- ⑤ **FW:** Micro-USB port for firmware upgrade.

### Rear Panel

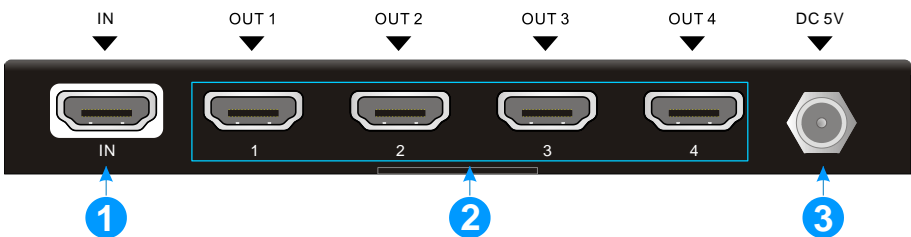


- ① **INPUT:** Type-A female HDMI input port to connect a HDMI source.
- ② **OUTPUTS:** Four type-A female HDMI output ports to connect HDMI displays.
- ③ **DC 5V:** DC barrel port to connect an AC power adapter.

## DIP Switch Operation


### EDID Management

The Extended Display Identification Data (EDID) is used by the source device to match its video resolution with the connected display. By default, the source device obtains its EDID from the first connected display. Meanwhile, since the displays with different capabilities are connected to the splitter, the DIP switch on the front panel can be used to set the EDID to a fixed value to ensure the compatibility in video resolution.

The switch represents "0" when in the lower (**OFF**) position, and it represents "1" while putting the switch in the upper (**ON**) position.



Switch 1-3 are used for EDID setting. The DIP switch status and its corresponding setting are shown at the back of the product.

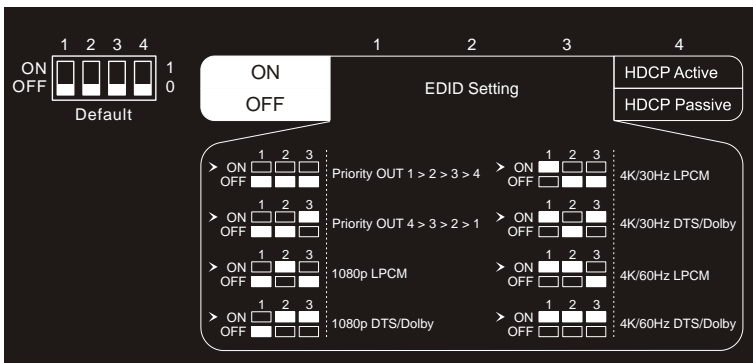

Switch Status	Video Resolution	Audio Format
000	Obtains EDID from the first detected display starting at HDMI output 1>2>3>4.	
001	Obtains EDID from the first detected display starting at HDMI output 4>3>2>1.	
010	1080P	LPCM
011	1080P	DTS/Dolby
100	3840x2160@30Hz HDR	LPCM
101	3840x2160@30Hz HDR	DTS/Dolby
110	3840x2160@60Hz HDR	LPCM
111	3840x2160@60Hz HDR	DTS/Dolby

## HDCP Mode

Put switch 4 on "ON" position to select **HDCP Active** mode, or to "OFF" for **HDCP Passive** mode.

Switch Status	Mode	HDCP
<b>OFF (0)</b>	Passive (Default)	Automatically follows the display's HDCP version.
<b>ON (1)</b>	Active	Automatically removes the HDCP content of HDMI output for broader video solution.

## Video Resolution Down-scaling

The product supports video resolution down-scaling, the 4K input can be automatically degraded to 1080P output for compatibility with 1080P display, shown in the below chart.

#	Input			Output	
	Resolution	Refresh	Color Space	Downscale	1080P Specs
1	3840x2160	60	4:4:4	Support	1080P@60Hz 4:4:4
2	3840x2160	30	4:4:4	Support	1080P@30Hz 4:4:4
3	3840x2160	24	4:4:4	Support	1080P@24Hz 4:4:4
4	3840x2160	60	4:2:0	Support	1080P@60Hz 4:2:0



---

#	Resolution	Refresh	Color Space	Downscale	1080P Specs
5	3840x2160	30	4:2:0	Support	1080P@30Hz 4:2:0
6	3840x2160	24	4:2:0	Support	1080P@24Hz 4:2:0
7	3840x2160	60	4:2:2	Not Support	N/A
8	3840x2160	30	4:2:2	Not Support	N/A
9	3840x2160	24	4:2:2	Not Support	N/A


## Firmware Upgrade

Please follow the below steps to upgrade firmware by the Micro-USB port:

- 1) Connect the splitter to the PC with USB cable.
- 2) Power on the splitter, and then the PC will automatically detect a U-disk named of "BOOTDISK".
- 3) Double-click to open the U-disk, a file named of "READY.TXT" will be showed.
- 4) Copy the latest upgrade file (.bin) to the "BOOTDISK" U-disk directly.
- 5) If the filename "READY.TXT" automatically turns to "SUCCESS.TXT", the firmware was upgraded successfully. If the firmware upgrade failed, please check the file (.bin) and then follow the above procedure to operate again.
- 6) Remove the USB cable after firmware upgrade.

## System Connection

The following diagram illustrates the typical input and output connection of the splitter:

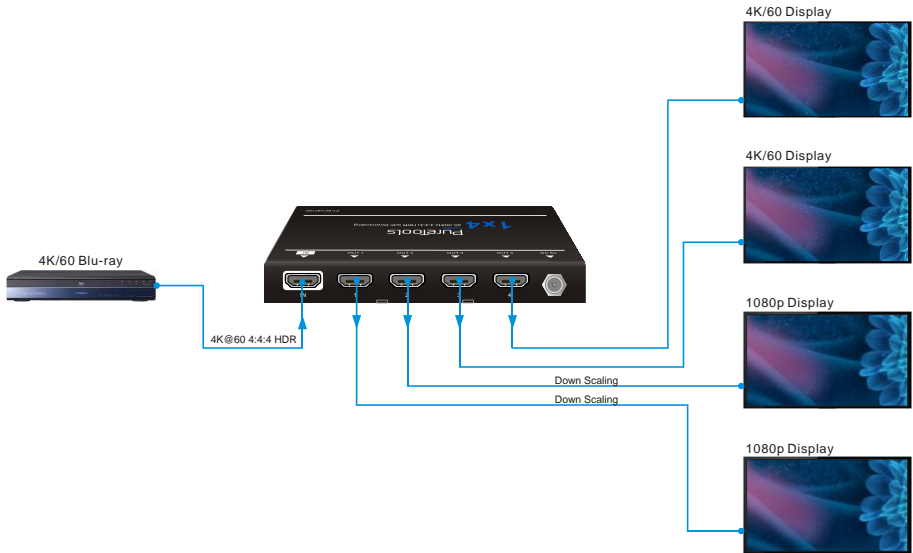

## Technical Specification

Video Input	
Input	(1) HDMI
Input Connector	(1) Type-A female HDMI
HDMI Input Resolution	Up to 4Kx2K@60Hz 4:4:4 8bit
HDMI Standard	2.0
HDCP Version	2.2, 1.4 compliant
CEC	Supported
Video Output	
Output	(4) HDMI
Output Connector	(4) Type-A female HDMI
HDMI Output Resolution	Up to 4Kx2K@60Hz 4:4:4 8bit
HDMI Standard	2.0
HDCP Version	2.2, 1.4 compliant
CEC	Supported
Control	
Control Part	(1) EDID 4-pin DIP switch, (1) Micro-USB port
General	
Bandwidth	18Gbps
HDMI 2.0 Cable Length	4K@60Hz 4:4:4 ≤ 5m, 4K@60Hz 4:2:0 ≤ 15m, 1080P ≤ 20m
Operation Temperature	-10℃ ~ +55℃
Storage Temperature	-25℃ ~ +70℃
Relative Humidity	10%-90%
Power Supply	Input:100V~240V AC, Output: 5V DC 1A
Power Consumption	2.5W (Max)
Dimension (W*H*D)	142.0mm x 17.6mm x 70.4mm
Net Weight	260g

**Note:** Please adopt high-qualified HDMI cable fully compliant with HDMI 2.0 for reliable transmission and connection.

## After-Sales Service

If there appear some problems when running the product, please check and deal with the problems referring to this user manual. Any transport costs are borne by the users during the warranty.

- 1) **Product Limited Warranty:** The product will be free from defects in materials and workmanship for **two years** (The purchase invoice shall prevail).  
Proof of purchase in the form of a bill of sale or receipted invoice which is evidence that the unit is within the Warranty period must be presented to obtain warranty service.
  
- 2) **What the warranty does not cover (servicing available for a fee):**
  - Warranty expiration.
  - Factory applied serial number has been altered or removed from the product.
  - Damage, deterioration or malfunction caused by:
    - Normal wear and tear.
    - Use of supplies or parts not meeting our specifications.
    - No certificate or invoice as the proof of warranty.
    - The product model showed on the warranty card does not match with the model of the product for repairing or had been altered.
    - Damage caused by force majeure.
    - Servicing not authorized by distributor.
    - Any other causes which does not relate to a product defect.
  - Delivery, installation or labor charges for installation or setup of the product.
  
- 3) **Technical Support:** For any questions or problems, contact your distributor or reseller and tell them the respective product name and version, the detailed failure situation as well as the formation of the cases.







## Asking for Assistance

**Technical Support:**

Phone: +49 5971 800299 - 0

Fax: +49 5971 800299 – 99

**Technical Support Hours:**

8:30 AM to 5:00 PM Monday thru Thursday

8:30 AM to 4:00 PM Friday

**Write to:**

PureLink GmbH

Von-Liebig-Straße 10

D - 48432 Rheine

[www.purelink.de](http://www.purelink.de)

[info@purelink.de](mailto:info@purelink.de)

---